

AD-A056 239

ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND DOVER--ETC F/G 17/8  
THE EFFECT OF FLARE FLICKER ON THE RECOGNITION PROBABILITY OF V--ETC(U)  
APR 78 R B DAVIS

UNCLASSIFIED

ARLCO-TR-77050

SBIE-AD-E400 156

NL

| OF |

AD  
A056239




END

DATE

FILMED

8 -78

DDC

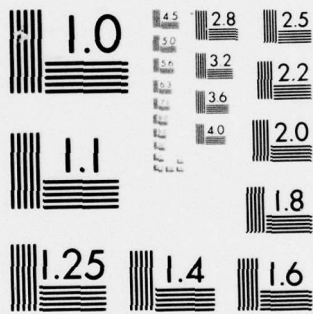

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD A056239

AD No. \_\_\_\_\_  
DC FILE COPY

12

LEVEL

6/9  
AD

AD-E400 156

TECHNICAL REPORT ARLCD-TR-77050

THE EFFECT OF FLARE FLICKER ON THE  
RECOGNITION PROBABILITY OF  
VEHICULAR SIZE TARGETS

ROBERT B. DAVIS

APRIL 1978



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND  
LARGE CALIBER  
WEAPON SYSTEMS LABORATORY  
DOVER, NEW JERSEY

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED.

DDC  
RECEIVED  
JUL 17 1978  
B

The findings in this report are not to be construed  
as an official Department of the Army position.

#### DISPOSITION

Destroy this report when no longer needed. Do not  
return to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Report ARLCD-TR-77050	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
6. TITLE (and Subtitle) The Effect of Flare Flicker on the Recognition Probability of Vehicular Size Targets		5. TYPE OF REPORT & PERIOD COVERED 9 Final report
7. AUTHOR(s) 11 Robert B. Davis		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Explosives Division Feltman Research Laboratory Picatinny Arsenal, Dover, NJ 07801		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS Commander, US Army ARRADCOM ATTN: DRDAR-TSS Dover, NJ 07801		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS PA73-016
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Commander, US Army ARRADCOM Large Caliber Weapon Systems Laboratory Dover, NJ 07801		12. REPORT DATE 11 April 1978
		13. NUMBER OF PAGES 20 12/13 p.
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)  18 SBIE 19 AD-E411 156		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Flare flicker                      Terrain model Target recognition Illumination		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The present specifications on flare production are set without any quantitative information on how the various parameters of flare light influence an observer's ability to recognize targets. A study was conducted using the Picatinny Arsenal Pyrotechnic Terrain Model to examine one of these parameters, flare flicker, and its effect on target recognition. Illumination necessary for recognition at selected frequencies and at one frequency and several levels of modulation imposed upon a steady illumination level were examined.		

**UNCLASSIFIED**

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. Abstract (Continued)

The study concludes that the average illumination required for recognition is not affected significantly by flicker.

PROJECT NO.		1
ACCS	FORM 1000	<input checked="" type="checkbox"/>
DOC	DOC	<input type="checkbox"/>
DISPATCH		<input type="checkbox"/>
INDEXED		<input type="checkbox"/>
BY		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL	OR/ON SPEC
A		

**UNCLASSIFIED**

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

#### ACKNOWLEDGMENT

The guidance and advice of Mr. Jesse F. Tyroler and the assistance of Mr. Henry Widmann in the collection and reduction of the data used in this report are sincerely appreciated by the author.

## TABLE OF CONTENTS

	<u>Page No.</u>
Introduction	1
Method	1
Experimental	2
Results	3
Conclusions	3
Figures	
1 Actual shape of light transient from simulated flare as measured at 5 Hz	5
2 Illumination requirements for recognition of vehicular size targets at selected frequencies and 100% flicker level	6
3 Typical signal with components for determining percent flicker	7
4 Average illumination requirements for recognition of vehicular size targets at a frequency of 5 Hz as a function of the percent flicker	8
Distribution List	9

## INTRODUCTION

The effect of the various parameters of flare light on target recognition has been the subject of an investigation conducted by the Feltman Research Laboratory, Picatinny Arsenal. A terrain model based on Southeast Asian-type terrain was constructed on a scale of 160:1 for use in the investigation.

Previous work on this subject is described in the following reports:

Picatinny Arsenal Technical Report 4075, "Pyrotechnic Terrain Model, A New Dimension in Pyrotechnic Evaluation, Description and Initial Results," Dec 1970, by Jesse F. Tyroler

Picatinny Arsenal Technical Report 4184, "Results of an Illumination Requirement Study Using a Pyrotechnic Terrain Model," Nov 1971, by Robert B. Davis

Pyrotechnics Division Information Report 5-72, "An Investigation of the Effect of Changes in Flare Intensity on the Recognition Probability of Vehicular Size Targets," Dec 1972, by Robert B. Davis and Jesse F. Tyroler.

The purpose of the work described in this report was to determine the effect of "flicker", one of the parameters of flare illumination, on an observer's ability to recognize vehicular-size targets. This information was developed at the request of the Army Materials and Mechanics Research Center, Watertown, MA.

## METHOD

The observers used for this test were US Army and civilian personnel stationed or employed at Picatinny Arsenal. All observers had normal vision, either natural or corrected by eyeglasses. The observers were given an orientation of the terrain model and of the targets to be recognized, the method of target presentation, and the type of response desired ("Large truck, side", "Jeep, front", etc.). Subsequently, they were dark-adapted for at least 30 minutes, and stationed at the proper distance for the test. The simulated flare was positioned in the desired orientation with respect to the observer and target. The observer was allowed to control the intensity of the simulated flare so that, as the level of illumination slowly increased, he could stop the test at the instant of recognition.

The illumination was provided by a 250 watt tungsten-filament lamp spectrally corrected by a special translucent paint to duplicate the wavelength distribution of a visible flare. The power to operate the simulated flare was taken from a programmable DC supply and fed through a heavy-duty rheostat which was driven by a motor geared to turn at 0.1 rpm and controlled by the observer. The flicker was produced by a square-wave signal introduced to the programming section of the power supply. The illumination was measured with a Weston Model 1979 Illumination Meter, which was modified for greater sensitivity, and a Consolidated Electrodynamics Oscillograph which monitored and recorded the signal generated by the simulated flare.

### EXPERIMENTAL

The first experiment was to determine the required illumination for target recognition using a signal of 100% flicker, i.e., on-off mode, at various frequencies. The frequencies examined were 1, 3, 5, 10, 15, and 25 Hz. The wave shape of a 5-Hz signal is shown in Figure 1.

Figure 2 illustrates the average illumination required for 100% flicker at each frequency (using six observers) as compared to that required from a steady state source.

The specific conditions of this test were:

1. Flare, target, observer angle  $117^\circ$ .
2. Simulated range 640 m (2100 ft).
3. Background, medium green, grassy area.
4. Observation from ground level.

The method used to determine the percentage of flicker in the signal for this and the following experiment is shown in Figure 3.

The second portion of this experiment was to determine the illumination requirements for target recognition as a function of the amount of flicker, i.e., an illumination level with a flickering light superimposed on it, at a frequency of 5 Hz, the frequency shown to have the most adverse effect on recognition. The test conditions were the same as those

of the previous test. However, only two observers, whose performance in target recognition tests was well established, were used for this test. The results of this experiment are shown in Figure 4.

### RESULTS

The results of the first experiment (Fig 2) indicate that, at a 100% flicker level, more illumination than that of the steady state is necessary for target recognition at frequencies in the 2 to 10 Hz range. The second experiment was conducted at 5 Hz, the frequency at which the greatest detrimental effect was noted. However, results of the second experiment (Fig 4) show that at reasonable levels of flicker (which, in an actual flare, can only occasionally go as high as 40%) virtually no difference exists from the average illumination level necessary for target recognition from both constant and flickering sources.

### CONCLUSIONS

On the basis of this limited study, the pyrotechnic design engineer or specification writer should not be overly concerned with the problem of flare flicker and the resulting effect on target recognition. With modulation or percentage of flicker as high as 50%, the increase in illumination necessary for target recognition is negligible.

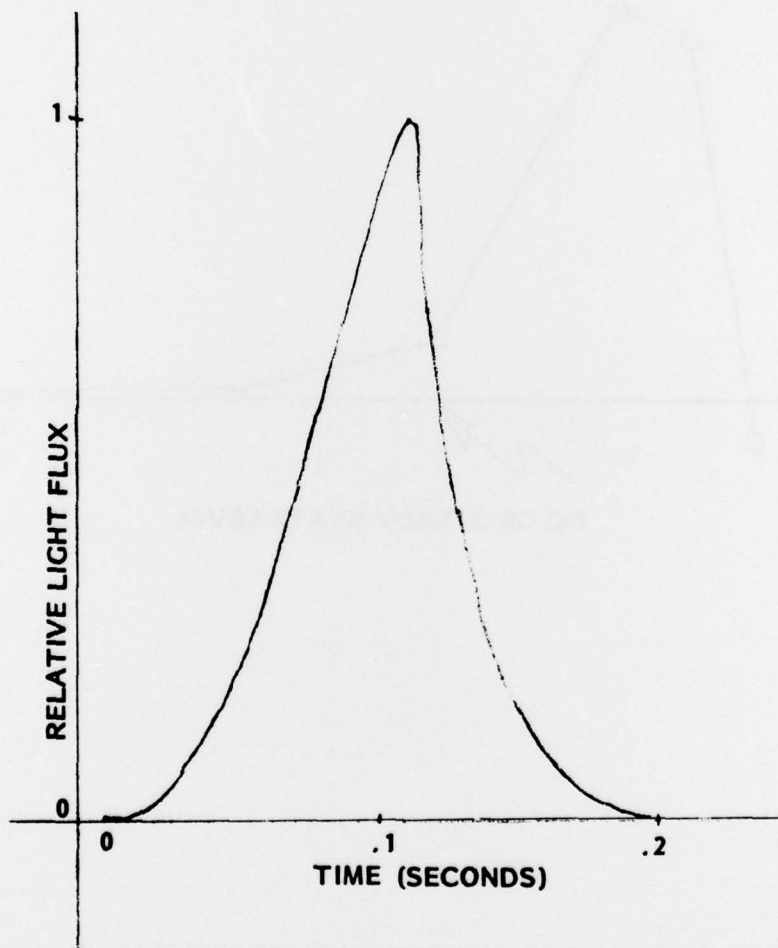


Fig 1 Actual shape of light transient from simulated flare as measured at 5 Hz

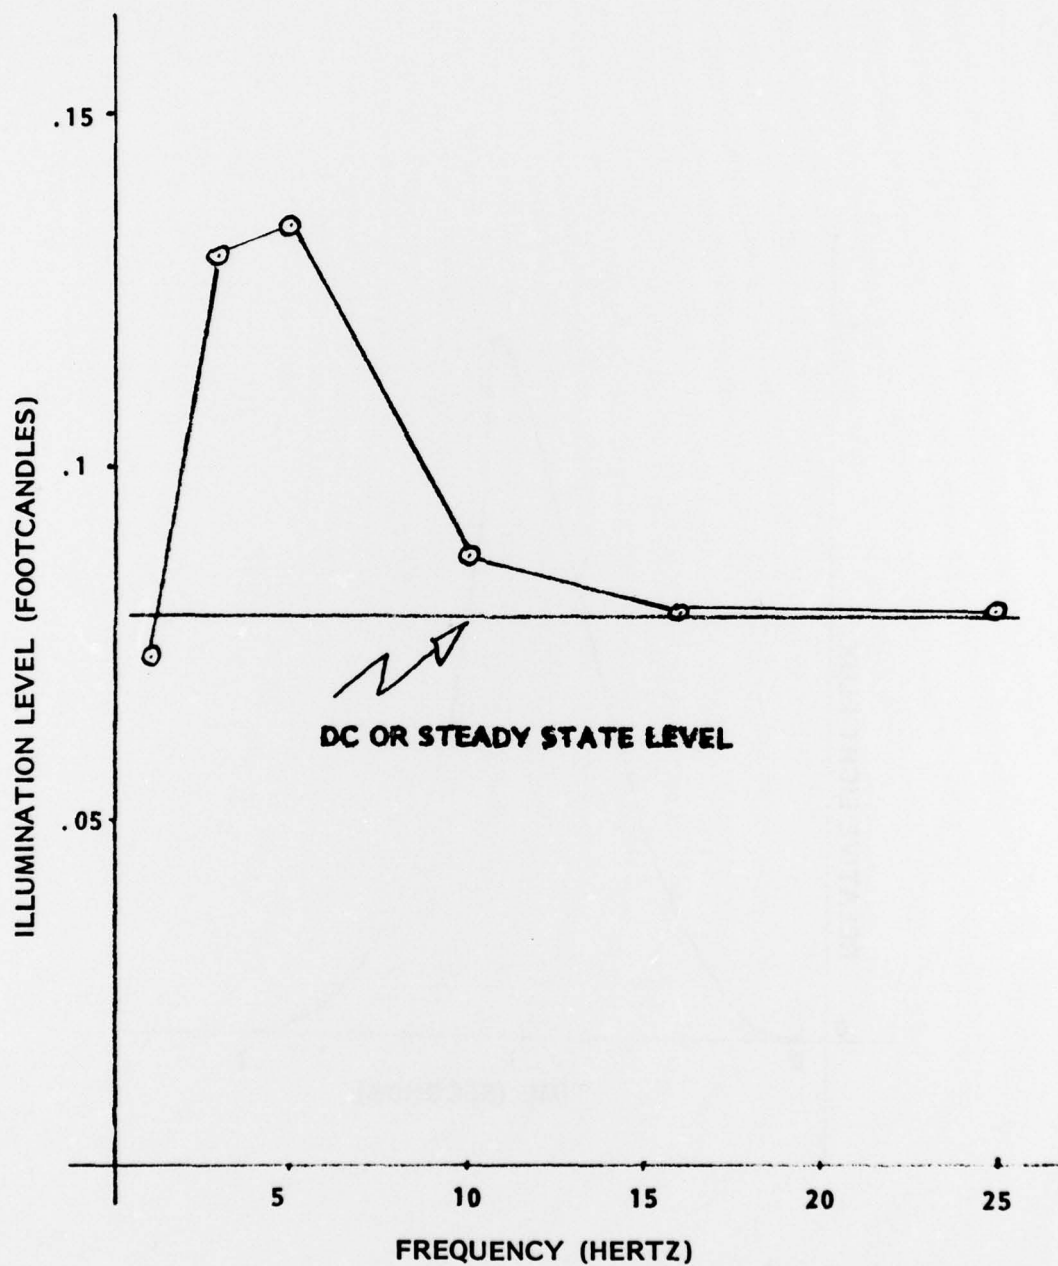


Fig 2 Illumination requirements for recognition of vehicular size targets at selected frequencies and 100% flicker level

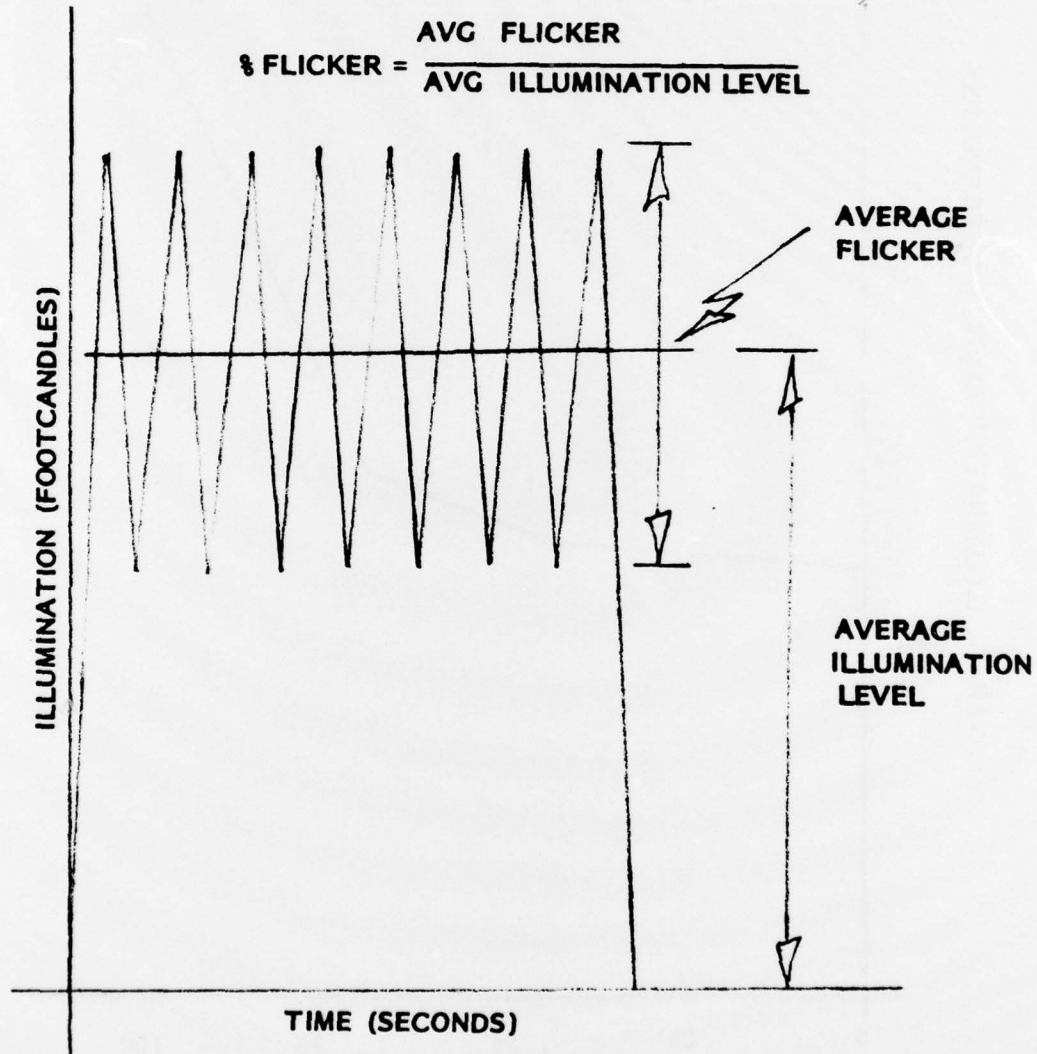


Fig 3 Typical signal with components for determining percent flicker

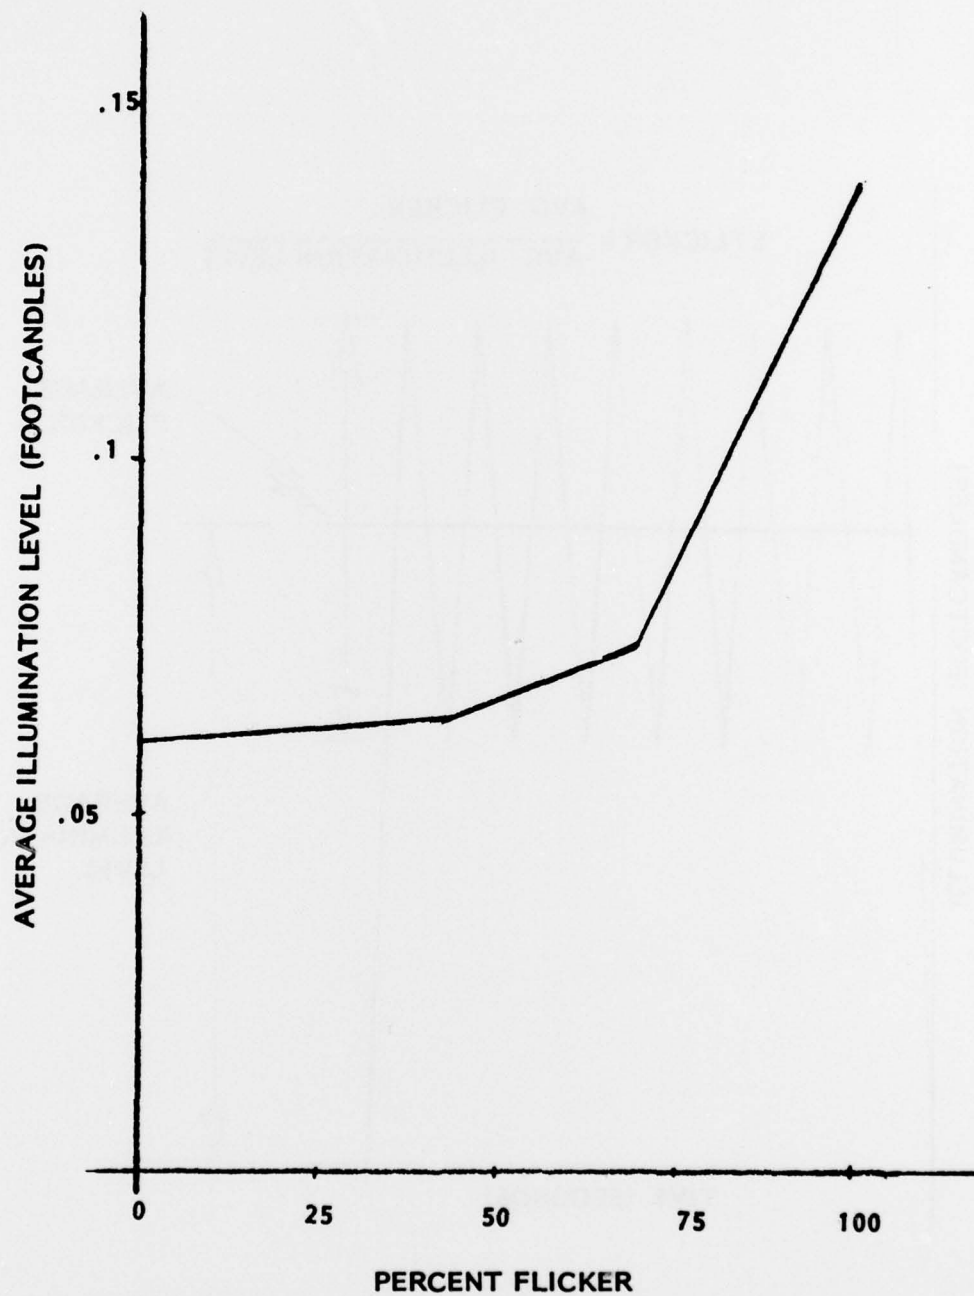


Fig 4 Average illumination requirements for recognition of vehicular size targets at a frequency of 5 Hz as a function of the percent flicker

## DISTRIBUTION LIST

Metals and Ceramics Information Center  
ATTN: Mr. Harold Mindlin, Director  
Mr. James Lynch, Asst Director  
505 King Avenue  
Columbus, OH 43201

Commander  
Defense Documentation Center (12)  
Cameron Station,  
Alexandria, VA 22314

Commander  
US Army Foreign Science & Technology Center  
ATTN: DRXST-SD3  
220 Seventh Street NE  
Charlottesville, VA 22901

Office of the Deputy Chief of Staff for Research,  
Development and Acquisition  
ATTN: DAMA-ARZ-E  
DAMA-CSS  
Washington, DC 20310

Commander  
Army Research Office  
ATTN: Dr. George Mayer  
Mr. J. J. Murray  
P.O. Box 12211  
Research Triangle Park, NC 27709

Commander  
US Army Materiel Development & Readiness Command  
ATTN: DRCQA-E  
DRCQA-P  
DRCDE-D  
DRCDMD-FT  
DRCLDC  
DRCMT  
DRCMM-M  
Alexandria, VA 22333

Commander  
US Army Electronics Command  
ATTN: DRSEL-PA-E, Mr. Stan Alster (2)  
Fort Monmouth, NJ 07703

Commander  
US Army Missile Research & Development Command  
ATTN: DRDMI-TB, Redstone Scientific Information Center (2)  
DRDMI-TK, Mr. J. Alley  
DRSMI-M  
DRDMI-ET, Mr. Robert O. Black  
DRDMI-QS, Mr. George L. Stewart, Jr.  
DRDMI-EAT, Mr. R. Talley  
DRDMI-QP

Redstone Arsenal, AL 35809

Commander  
US Army Troop Support and Aviation Materiel Readiness Command  
ATTN: DRSTS-PL, Mr. J. Corwin  
DRSTS-Q  
DRSTS-M

4300 Goodfellow Boulevard  
St. Louis, MO 63120

Commander  
US Army Natick Research & Development Command  
ATTN: DRXNM-EM  
Natick, MA 01760

Commander  
US Army Mobility Equipment Research & Development Command  
ATTN: DRDME-D  
DRDME-E  
DRDME-G  
DRDME-H  
DRDME-M  
DRDME-T  
DRDME-TQ  
DRDME-V  
DRDME-ZE  
DRDME-N

Fort Belvoir, VA 22060

Commander  
US Army Tank-Automotive Materiel Readiness Command  
ATTN: DRSTA-Q (2)  
Warren, MI 48090

Commander  
US Army Armament Materiel Readiness Command  
ATTN: DRSAR-QA (2)  
      DRSAR-SC  
      DRSAR-RDP  
      DRSAR-EN  
      DRSAR-QAE  
      DRSAR-LEP-L  
Rock Island, IL 61299

Commander  
US Army Armament Research & Development Command  
ATTN: DRDAR-LC, Mr. E. Kelly  
      DRDAR-LCA, Dr. Sharkoff  
      DRDAR-LCE, Dr. R. Walker  
      DRDAR-QAS, Mr. F. Fitzsimmons (5)  
      DRDAR-SCM, Dr. J. Corrie  
      DRDAR-TSP, Mr. B. Stephans  
      DRDAR-TSS (5)  
Dover, NJ 07801

Commander  
US Army Aviation R&D Command  
ATTN: DRDAV-EXT  
      DRDAV-QR  
      DRDAV-QP  
      DRDAR-QE  
St. Louis, MO 63166

Commander  
US Army Tank-Automotive Research & Development Command  
ATTN: DRDTA-RKA, Mr. D. Matichuk  
      DRDTA-RKA, Mr. R. Dunec  
      DRDTA-RKA, Mr. S. Catalano  
      DRDTA-JA, Mr. C. Kedzior  
      DRDTA-UL, Technical Library  
Warren, MI 48090

Director  
US Army Industrial Base Engineering Activity  
ATTN: DRXPE-MT, Dr. W. T. Yang  
Rock Island, IL 61299

Commander  
Harry Diamond Laboratories  
ATTN: DRXDO-EDE, Mr. B. F. Willis  
2800 Powder Mill Road  
Adelphi, MD 20783

Commander  
US Army Test & Evaluation Command  
ATTN: DRSTE-TD  
DRSTE-ME  
Aberdeen Proving Ground, MD 21005

Commander  
US Army White Sands Missile Range  
ATTN: STEWS-AD-L  
STEWS-ID  
STEWS-TD-PM  
White Sands Missile Range, NM 88002

Commander  
US Army Yuma Proving Ground  
ATTN: Technical Library  
Yuma, AR 85364

Commander  
US Army Tropic Test Center  
ATTN: STETC-TD, Drawer 942  
Fort Clayton, Canal Zone

Commander  
Aberdeen Proving Ground  
ATTN: STEAP-MT  
STEAP-TL  
STEAP-MT-M, Mr. J. A. Feroli  
STEAP-MT-G, Mr. R. L. Huddleston  
Aberdeen Proving Ground, MD 21005

Commander  
US Army Cold Region Test Center  
ATTN: STECR-OP-PM  
APO Seattle, WA 98733

Commander  
US Army Dugway Proving Ground  
ATTN: STEDP-MT  
Dugway, UT 84022

Commander  
US Army Electronic Proving Ground  
ATTN: STEEP-MT  
Ft. Huachuca, AR 85613

Commander  
Jefferson Proving Ground  
ATTN: STEJP-TD-I  
Madison, IN 47250

Commander  
US Army Aircraft Development Test Activity  
ATTN: STEBG-TD  
Ft. Rucker, AL 36362

President  
US Army Armor and Engineer Board  
ATTN: ATZKOE-TA  
Ft. Knox, KY 40121

President  
US Army Field Artillery Board  
ATTN: ATZR-BDOP  
Ft. Sill, OK 73503

Commander  
Anniston Army Depot  
ATTN: SDSAN-QA  
Anniston, AL 36202

Commander  
Corpus Christi Army Depot  
ATTN: SDSCC-MEE, Mr. Haggerty  
Mail Stop 55  
Corpus Christi, TX 78419

Commander  
Letterkenny Army Depot  
ATTN: SDS-LE-QA  
Chambersburg, PA 17201

Commander  
Lexington-Bluegrass Army Depot  
ATTN: SDSRR-QA  
Lexington, KY 40507

Commander  
New Cumberland Army Depot  
ATTN: SDSNC-QA  
New Cumberland, PA 17070

Commander  
US Army Depot Activity, Pueblo  
ATTN: SDSTE-PU-O  
Pueblo, CO 81001

Commander  
Red River Army Depot  
ATTN: SDSRR-QA  
Texarkana, TX 75501

Commander  
Sacramento Army Depot  
ATTN: SDSSA-QA  
Sacramento, CA 95813

Commander  
Savanna Army Depot Activity  
ATTN: SDSSV-S  
Savanna, IL 61074

Commander  
Seneca Army Depot  
ATTN: SDSSE-R  
Romulus, NY 14541

Commander  
Sharpe Army Depot  
ATTN: SDSSH-QE  
Lathrop, CA 95330

Commander  
Sierra Army Depot  
ATTN: SDSSI-DQA  
Herlong, CA 96113

Commander  
Tobyhanna Army Depot  
ATTN: SDSTO-Q  
Tobyhanna, PA 18466

Commander  
Tooele Army Depot  
ATTN: SDSTE-QA  
Tooele, UT 84074

Director  
DARCOM Ammunition Center  
ATTN: SARAC-DE  
Savanna, IL 61074

Naval Research Laboratory  
ATTN: Dr. J. M. Krafft, Code 8430  
Library, Code 2620  
Washington, DC 20375

Director  
Air Force Materiel Laboratory  
ATTN: AFML-DO, Library  
AFML-LTM, Mr. E. Wheeler  
AFML-LLP, Mr. R. Rowand  
Wright-Patterson AFB, OH 45433

Weapon System Concept Team/CSL  
ATTN: DRDAR-ACW  
Aberdeen Proving Ground, MD 21010

Technical Library  
ATTN: DRDAR-CLJ-L  
Aberdeen Proving Ground, MD 21010

Technical Library  
ATTN: DRDAR-TSB-S  
Aberdeen Proving Ground, MD 21005

Benet Weapons Laboratory  
Technical Library  
ATTN: DRDAR-LCB-TL  
DRDAR-LCB, Mr. T. Moraczewski  
Watervliet, NY 12189

Director  
US Army TRADOC Systems Analysis Activity  
ATTN: ATAA-SL, Technical Library  
White Sands Missile Range, NM 88002

Director  
Army Materials and Mechanics Research Center  
ATTN: DRXMR-P  
DRXMR-PL (2)  
DRXMR-M (2)  
DRXMR-MQ  
DRXMR-MI, Mr. Darch  
DRXMR-L, Dr. Chait  
DRXMR-RA, Mr. Valente  
Watertown, MA 02172

Commander  
Chemical Systems Laboratory  
ATTN: DRDAR-CLR, Mr. Montaway  
DRDAR-QAC, Dr. Moritz  
Aberdeen Proving Ground, MD 21010